


# HFGT600无柱积极式筒子架

## HFGT600 Non-pillar Positive Type Creel

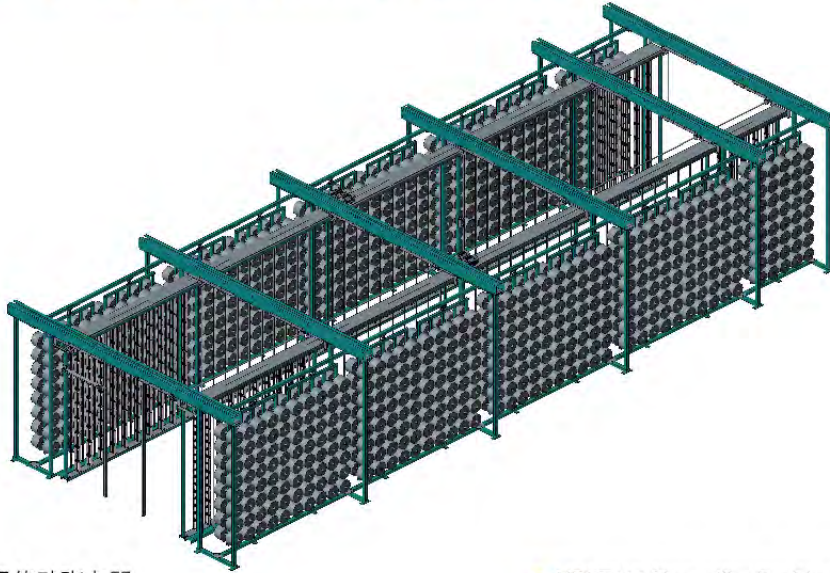

- HFGT600 无柱积极传动张力器
- 保持经纱片全长和宽度上的经纱张力恒定

- HFGT600 Non-pillar Positive Drive Tensioner
- Ensure constant tension of full length and width of warp yarn

### 优点

- 适用于所有种类纱线
- 适应纱支范围大
- 纱线张力为中央调整
- 自动张力调节
- 拉纱速度高
- 通过驱动盘片进行表面清洁
- 内置独立吹气装置
- 操作简便

### Advantages

- Suitable for all kinds of yarn
- Big adaption range of yarn count
- Central adjustment of yarn tension
- Automatic tension adjustment
- High speed of yarn drawing
- Surface cleaning by driving disc
- Internal individual blowing device
- Easy operation



纱线张力范围: 0-30CN、0-70CN、10-160CN  
Tension range: 0-30CN, 0-70CN, 10-160CN

### 可靠施加张力

- 给第二对盘片的上面一只盘片加压就可实现施加张力，第一对制动盘片保证纱线稳定，使得随后能以理想的比例施加张力

### Reliable tension applying

- Tension is achieved by giving pressure from the top of the second pair of discs. First pair of brake disc ensures stable yarn movement, and makes it possible to apply proper tension afterwards.



### 中央调整 / 调节的纱线张力器

- 通过中央控制台将筒子架一侧或者整个筒子架的纱线张力器施压部件移到所需位置，屏幕上随时可显示当前值


### Central adjustment yarn tensioner

- Control pressurizing parts on one side or whole creel to required position through central control station, and current tension value can be displayed on the screen.


## 江阴市华方新技术科研有限公司

JIANGYIN HUAFANG NEW TECHNOLOGY & SCIENTIFIC RESEARCH CO.,LTD.

 江苏省江阴市周庄镇长寿西张路11号  
11# Xizhang Road, Changshou, Zhouzhuang Town, Jiangyin City, Jiangsu Province

 137 0616 1133

 0510-86366213

 0510-86366212

 zzj@h-fang.com

 www.h-fang.com

通过灰尘防护与盘片驱动装置保持状态一致

- 施压部件和盘片驱动装置为防灰尘设计，即使在加工短纤维纱时也能确保其功能正常


Synchronize the status of disc driving device by dust-proof device

- Dust-proof design of pressurizing parts and disc driving device, ensure the proper function even when processing staple yarn.



选配项：剪纱装置  
Optional part: Cutting device

## 筒子架外形尺寸 Creel dimension

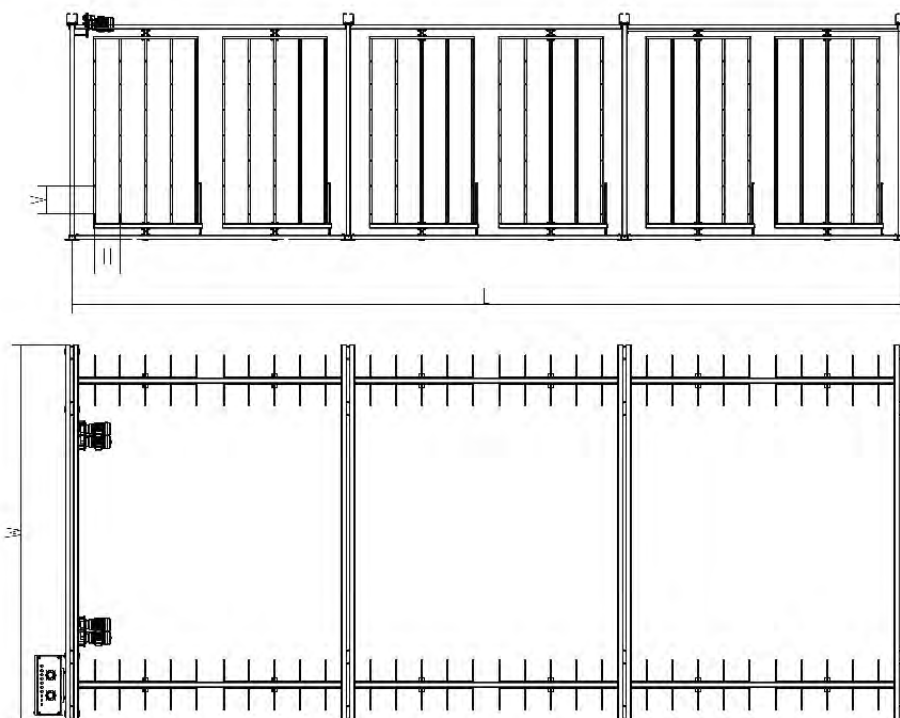

头份 Spindle qty.		480		560		640		720		800		880		960		1040	
锭距 Picht(HXV)	层数 Decks	L	W	L	W	L	W	L	W	L	W	L	W	L	W	L	W
230x230	8	7659	4120	9042	4120	10212	4420	11595	4420	12765	4420	14148	4720	15318	4720	16701	4720
250x250	8	8259	4120	9742	4120	11012	4420	12495	4420	13765	4420	15248	4720	16518	4720	18001	4720
270x270	8	8859	4120	10442	4120	11812	4420	13395	4420	14765	4420	16348	4720	17718	4720	19301	4720

头份 Spindle qty.		420		490		560		630		700		770		840		910	
锭距 Picht(HXV)	层数 Decks	L	W	L	W	L	W	L	W	L	W	L	W	L	W	L	W
300x300	7	9759	4120	11492	4120	13012	4420	14745	4420	16265	4420	17998	4720	19518	4720	21251	4720

头份 Spindle qty.		480		528		576		624		672		720		768		816	
锭距 Picht(HXV)	层数 Decks	L	W	L	W	L	W	L	W	L	W	L	W	L	W	L	W
320x320	6	14065	4420	15578	4420	16878	4420	18391	4720	19691	4720	21204	4720	22504	4720	24017	4720
350x350	6	15265	4420	16898	4420	18318	4420	19951	4720	21371	4720	23304	4720	24424	4720	26057	4720
400x400	6	17265	4420	19098	4420	20718	4420	22551	4720	24171	4720	26004	4720	27624	4720	29457	4720