


## H形复式筒子架 H Magazine Type Creel

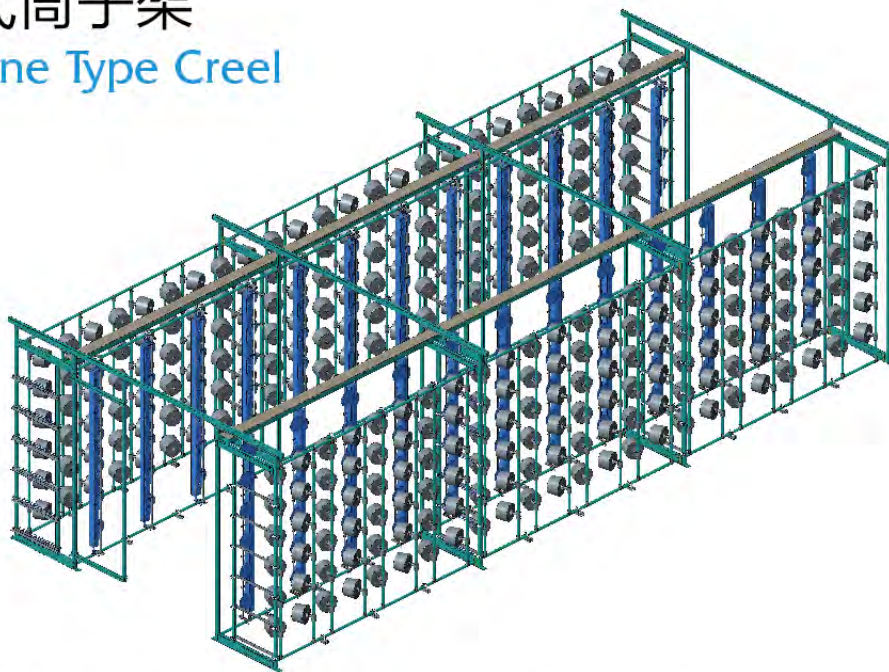

- 适用范围：适用于化纤长丝、短纤纱
- 性能特点：无需停车换纱，纱架长度较长
- 选配项：单锭吹气

- For polyester filament, staple yarn
- No need stop machine when changing bobbins, creel length is a bit long.
- Optional part: Individual blowing

## 张力器 Tensioner



### 三柱式张力器 3-pillar tensioner

适用范围：适用于短纤纱  
工作原理：通过调节纱线包角，改变纱线的张力  
张力范围：5-70CN  
For staple yarn  
Adjust yarn tension by changing yarn angle  
Tension range: 5-70CN



### 二三柱式张力器 2-pillar tensioner

适用范围：适用于短纤纱  
工作原理：通过改变纱线的包角，改变纱线的张力  
张力范围：10-25CN  
For staple yarn  
Adjust yarn tension by changing yarn angle  
Tension range: 10-25CN




### 三柱磁悬浮张力器 3-pillar magnetic suspension tensioner

适用范围：适用于短纤纱  
工作原理：通过调节磁柱的高低，改变纱线的张力  
张力范围：10-70CN  
For staple yarn  
Adjust yarn tension by lifting up and down of the column.  
Tension range: 10-70CN


## 江阴市华方新技术科研有限公司

JIANGYIN HUAFANG NEW TECHNOLOGY & SCIENTIFIC RESEARCH CO.,LTD.

 江苏省江阴市周庄镇长寿西张路11号  
11# Xizhang Road, Changshou, Zhouzhuang Town, Jiangyin City, Jiangsu Province

 137 0616 1133

 0510-86366213

 0510-86366212

 zzj@h-fang.com

 www.h-fang.com




**电子式张力器**  
Electronic tensioner

适用范围: 适用各种纱线  
工作原理: 通过改变张力片的吸合力, 改变纱线的张力  
张力范围: 5-70CN  
For various yarn  
Adjust yarn tension by changing tension disc suction force  
Tension range: 5-70CN



**单锭吹气**  
Individual blowing

**筒子架外形尺寸**  
Creel dimension

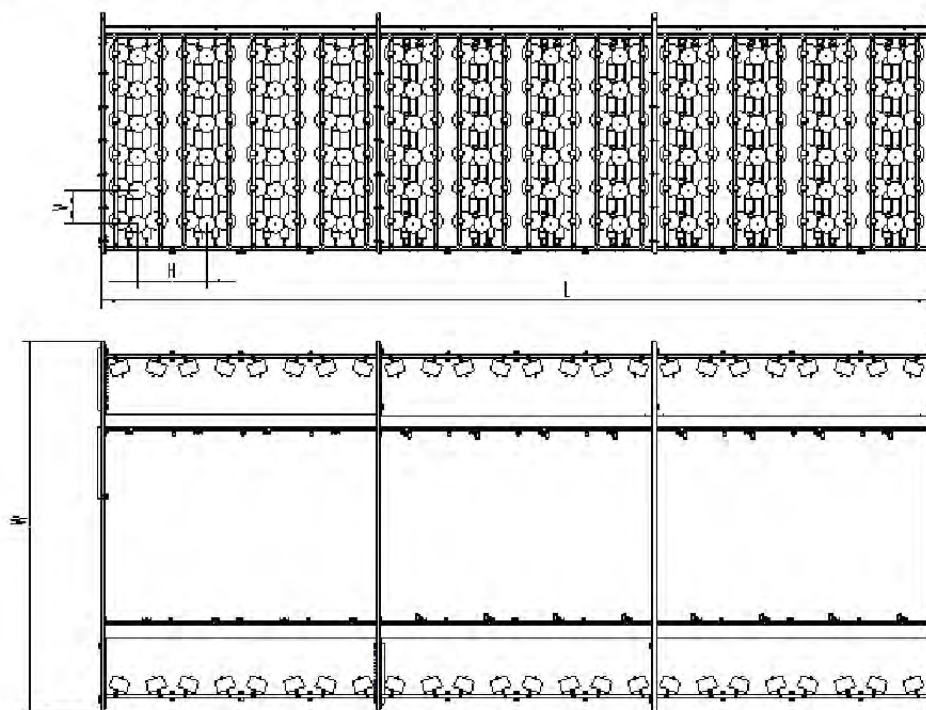

头份 Spindle qty.		448		512		576		640		704		768		832	
锭距 Picht(HXV)	层数 Decks	L	W	L	W	L	W	L	W	L	W	L	W	L	W
650×230	8	19250	4000	22000	4000	24750	4000	27500	4000	30250	4300	33000	4300	35750	4300
700×250	8	20300	4000	23200	4000	26100	4000	29000	4000	31900	4300	34800	4300	37700	4300
700×270	8	20300	4000	23200	4000	26100	4000	29000	4000	31900	4300	34800	4300	37700	4300
750×300	8	21350	4000	24400	4000	27450	4000	30500	4000	36600	4300	39650	4300	42700	4300

头份 Spindle qty.		432		480		528		576		624		672		720	
锭距 Picht(HXV)	层数 Decks	L	W	L	W	L	W	L	W	L	W	L	W	L	W
750×320	6	27450	4000	30500	4000	33550	4000	36000	4300	39650	4300	42700	4300	45750	4300
800×350	6	28800	4000	32000	4000	35200	4000	38400	4300	41600	4300	44800	4300	48000	4300
800×380	6	28800	4000	32000	4000	35200	4000	38400	4300	41600	4300	44800	4300	48000	4300