


H形回转式筒子架 H Turnover Type Creel

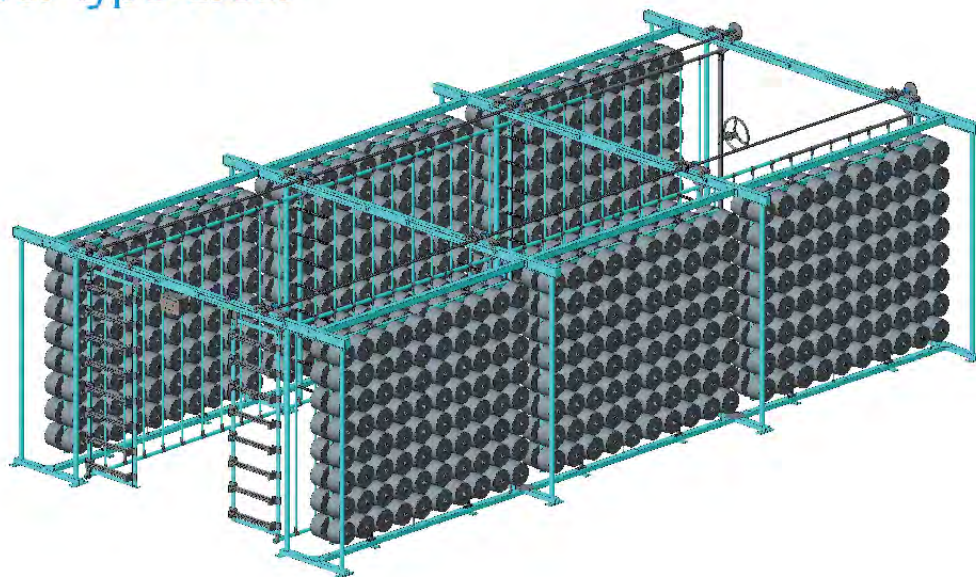

- 适用范围：适用于化纤长丝、短纤纱和产业用纱线
- 性能特点：一侧纱筒用完之后可以旋转到外侧再进行纱筒安装，换纱方便
- 选配项：纱线静电消除器

- For polyester filament, staple yarn and industrial yarn.
- Performance: Turn the completed bobbins to another side to change new ones, easy operation.
- Optional part: Static eliminator

张力器 Tensioner



吊环式张力器
Ring type tensioner

适用范围：适用于化纤长丝和短纤纱
工作原理：通过改变纱线的包角或瓷环的个数，改变纱线的张力
张力范围：3-20CN
For filament and staple yarn
Adjust yarn tension by changing yarn angle or ceramic ring number
Tension range: 3-20CN



二三柱式张力器
2-pillar tensioner

适用范围：适用于短纤纱
工作原理：通过改变纱线的包角，改变纱线的张力
张力范围：10-25CN
For staple yarn
Adjust yarn tension by changing yarn angle
Tension range: 10-25CN



三柱磁悬浮张力器
3-pillar magnetic suspension tensioner

适用范围：适用于短纤纱
工作原理：通过调节磁柱的高低，改变纱线的张力
纱线张力范围：10-70CN
For staple yarn
Adjust yarn tension by lifting up and down of the column.
Tension range: 10-70CN


江阴市华方新技术科研有限公司

JIANGYIN HUAFANG NEW TECHNOLOGY & SCIENTIFIC RESEARCH CO.,LTD.

 江苏省江阴市周庄镇长寿西张路11号
11# Xizhang Road, Changshou, Zhouzhuang Town, Jiangyin City, Jiangsu Province

 137 0616 1133

 0510-86366213

 0510-86366212


 zzj@h-fang.com

 www.h-fang.com



油阻尼张力器
Oil damping tensioner

适用范围: 适用各种纱线
工作原理: 通过调节纱线张力补偿装置的回弹力, 改变纱线的张力、
纱线张力范围: 5-35CN
For various yarn
Adjust yarn tension by changing resilience of tension compensation device.
Tension range: 5-35CN



空气阻尼张力器
Air damping tensioner



适用范围: 适用各种纱线
工作原理: 通过调节纱线张力补偿装置的回弹力, 改变纱线的张力
纱线张力范围: 10-160CN
For various yarn
Adjust yarn tension by changing resilience of tension compensation device.
Tension range: 10-160CN



六环式张力器
6-ring type tensioner

适用范围: 适用单丝包覆纱
工作原理: 通过改变压下的重锤数量, 改变纱线的张力
纱线张力范围: 5-100CN
For monofilament covered yarn
Adjust tension by changing the number of ring.
Tension range: 5-100CN

筒子架外形尺寸
Creel dimension

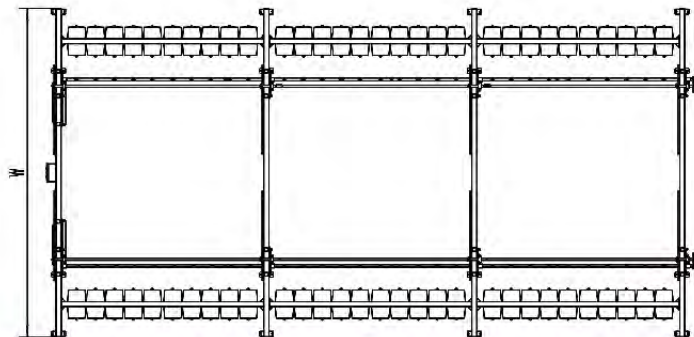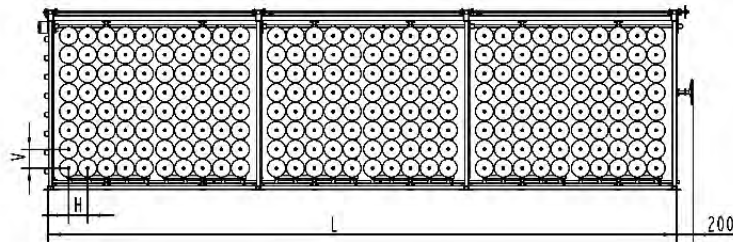

头份 Spindle qty.		480		560		640		720		800		880		960		1040	
锭距 Pitch(HXV)	层数 Decks	L	W	L	W	L	W	L	W	L	W	L	W	L	W	L	W
230×230	8	7590	4000	8950	4000	10120	4300	11480	4300	12650	4300	14010	4600	15180	4600	16540	4600
250×250	8	8190	4000	9650	4000	10920	4300	12380	4300	13650	4300	15110	4600	16380	4600	17840	4600
270×270	8	8790	4000	10350	4000	11720	4300	13280	4300	14650	4300	16210	4600	17580	4600	19140	4600
300×300	8	9690	4000	11400	4000	12920	4300	14630	4300	16150	4300	17860	4600	19380	4600	21090	4600

头份 Spindle qty.		432		480		528		576		624		672		720		768	
锭距 Pitch(HXV)	层数 Decks	L	W	L	W	L	W	L	W	L	W	L	W	L	W	L	W
320×320	6	12650	4300	13950	4300	15440	4300	16740	4300	18230	4600	19530	4600	21020	4600	22320	4600
350×350	6	13730	4300	15150	4300	16760	4300	18180	4300	19790	4600	21210	4600	22820	4600	24240	4600
380×380	6	14810	4300	16350	4300	18080	4300	19620	4300	21350	4600	22890	4600	24620	4600	26160	4600