


## H形推车式筒子架 H Trolley Type Creel

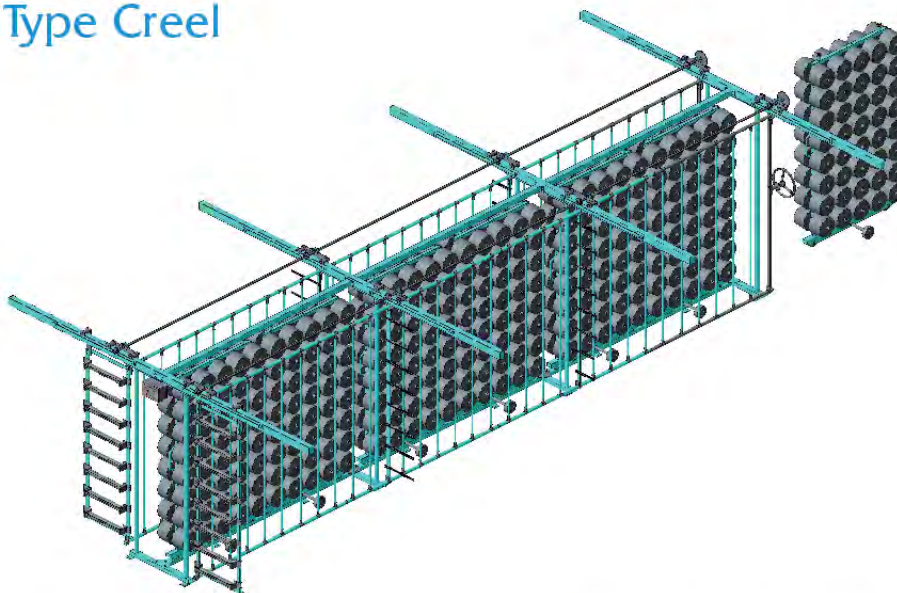

- 适用范围：适用于化纤长丝、短纤纱
- 性能特点：筒子架上的纱用完后，将纱筒小车推出，推入更换挂好纱筒的小车

- For polyester filament, staple yarn
- Performance: After bobbins are completed, pull out the trolleys and push in prepared trolleys.

## 张力器 Tensioner



**吊环式张力器**  
Ring type tensioner

适用范围：适用于化纤长丝和短纤纱  
工作原理：通过改变纱线的包角或瓷环的个数，改变纱线的张力  
张力范围：3-20CN

For filament and staple yarn  
Adjust yarn tension by changing yarn angle or ceramic ring number  
Tension range: 3-20CN



**二三柱式张力器**  
2-pillar tensioner

适用范围：适用于短纤纱  
工作原理：通过改变纱线的包角，改变纱线的张力  
张力范围：10-25CN

For staple yarn  
Adjust yarn tension by changing yarn angle  
Tension range: 10-25CN



**三柱磁悬浮张力器**  
3-pillar magnetic suspension tensioner


适用范围：适用于短纤纱  
工作原理：通过调节磁柱的高低，改变纱线的张力  
纱线张力范围：10-70CN

For staple yarn  
Adjust yarn tension by lifting up and down of the column.  
Tension range: 10-70CN


## 江阴市华方新技术科研有限公司

JIANGYIN HUAFANG NEW TECHNOLOGY & SCIENTIFIC RESEARCH CO.,LTD.

 江苏省江阴市周庄镇长寿西张路11号  
11# Xizhang Road, Changshou, Zhouzhuang Town, Jiangyin City, Jiangsu Province

 137 0616 1133


 0510-86366213

 0510-86366212

 zzj@h-fang.com

 www.h-fang.com

## 筒子架外形尺寸 Creel dimension

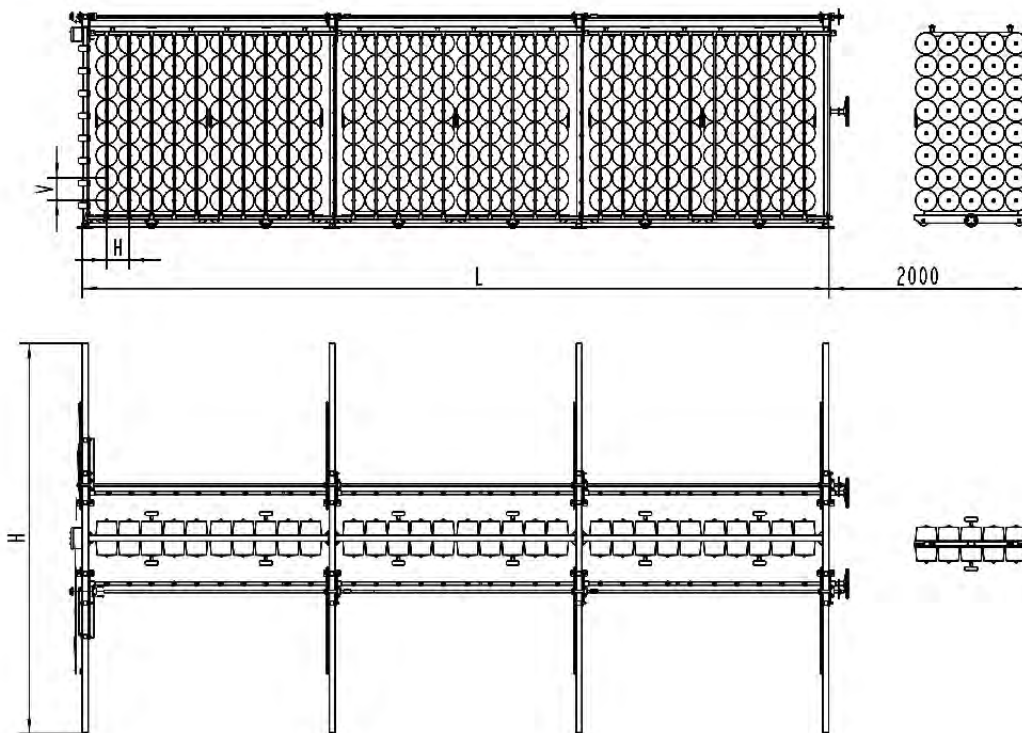

头份 Spindle qty.		480		560		640		720		800		880		960		1040	
锭距 Picht(HXV)	层数 Decks	L	W	L	W	L	W	L	W	L	W	L	W	L	W	L	W
230×230	8	8160	3600	9520	3600	10800	3800	12240	3800	13600	3800	14960	4000	16320	4000	17680	4000
250×250	8	8760	3600	10220	3600	11680	3800	13140	3800	14600	3800	16060	4000	17520	4000	18980	4000
270×270	8	9360	3600	10920	3600	12480	3800	14040	3800	15600	3800	17160	4000	18720	4000	20280	4000
300×300	8	10260	3600	11970	3600	13680	3800	15390	3800	17100	3800	18810	4000	20520	4000	22230	4000

头份 Spindle qty.		432		480		528		576		624		672		720		768	
锭距 Picht(HXV)	层数 Decks	L	W	L	W	L	W	L	W	L	W	L	W	L	W	L	W
320×320	6	13410	3800	14900	3800	16390	3800	17880	3800	19370	4000	20860	4000	22350	4000	13840	4000
350×350	6	14490	3800	16100	3800	17710	3800	19320	3800	20930	4000	22540	4000	24150	4000	25760	4000
380×380	6	15570	3800	17300	3800	19030	3800	20760	3800	22490	4000	24220	4000	25950	4000	27680	4000