


## 小V形筒子架 Small V Type Creel



- 适用范围：用于短纤纱
- 选配项：吊扇、巡回吹吸风、单锭吹气
- For staple yarn
- Optional parts: Ceiling fan, travelling cleaner, individual blowing

### 张力器 Tensioner

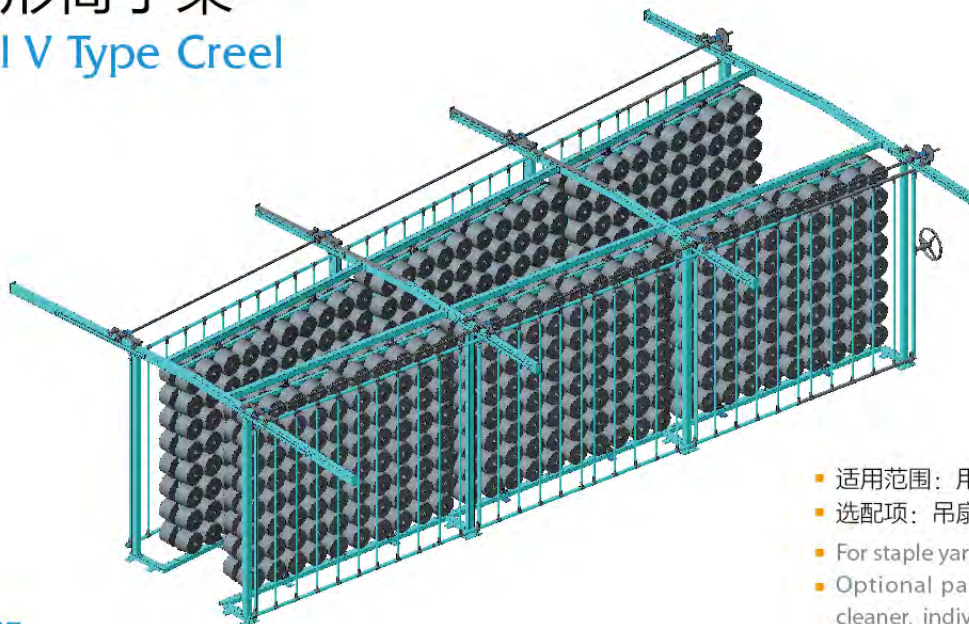

**吊环式张力器**  
Ring type tensioner

适用范围：适用于化纤长丝和短纤纱  
工作原理：通过改变纱线的包角或瓷环的个数，改变纱线的张力  
张力范围：3-20CN  
For filament and staple yarn  
Adjust yarn tension by changing yarn angle or ceramic ring number  
Tension range: 3-20CN



**二三柱式张力器**  
2-pillar tensioner

适用范围：适用于短纤纱  
工作原理：通过改变纱线的包角，改变纱线的张力  
张力范围：10-25CN  
For staple yarn  
Adjust yarn tension by changing yarn angle  
Tension range: 10-25CN



**三柱磁悬浮张力器**  
3-pillar magnetic suspension tensioner

适用范围：适用于短纤纱  
工作原理：通过调节磁柱的高低，改变纱线的张力  
张力范围：10-70CN  
For staple yarn  
Adjust yarn tension by lifting up and down of the column.  
Tension range: 10-70CN



**三柱式张力器**  
3-pillar tensioner

适用范围：适用于短纤纱  
工作原理：通过调节纱线包角，改变纱线的张力  
张力范围：5-70CN  
For staple yarn  
Adjust yarn tension by changing yarn angle  
Tension range: 5-70CN



**电子式张力器**  
Electronic tensioner

适用范围：适用各种纱线  
工作原理：通过改变张力片的吸合力，改变纱线的张力  
张力范围：5-70CN  
For various yarn  
Adjust yarn tension by changing tension disc suction force  
Tension range: 5-70CN

## 江阴市华方新技术科研有限公司

JIANGYIN HUAFANG NEW TECHNOLOGY & SCIENTIFIC RESEARCH CO.,LTD.

江苏省江阴市周庄镇长寿西张路11号  
11# Xizhang Road, Changshou, Zhouzhuang Town, Jiangyin City, Jiangsu Province

137 0616 1133

0510-86366213

0510-86366212

zzj@h-fang.com

www.h-fang.com



巡回吹吸风装置  
Travelling cleaner




单锭吹气  
Individual blowing



吊扇  
Ceiling fan

## 筒子架外形尺寸 Creel dimension

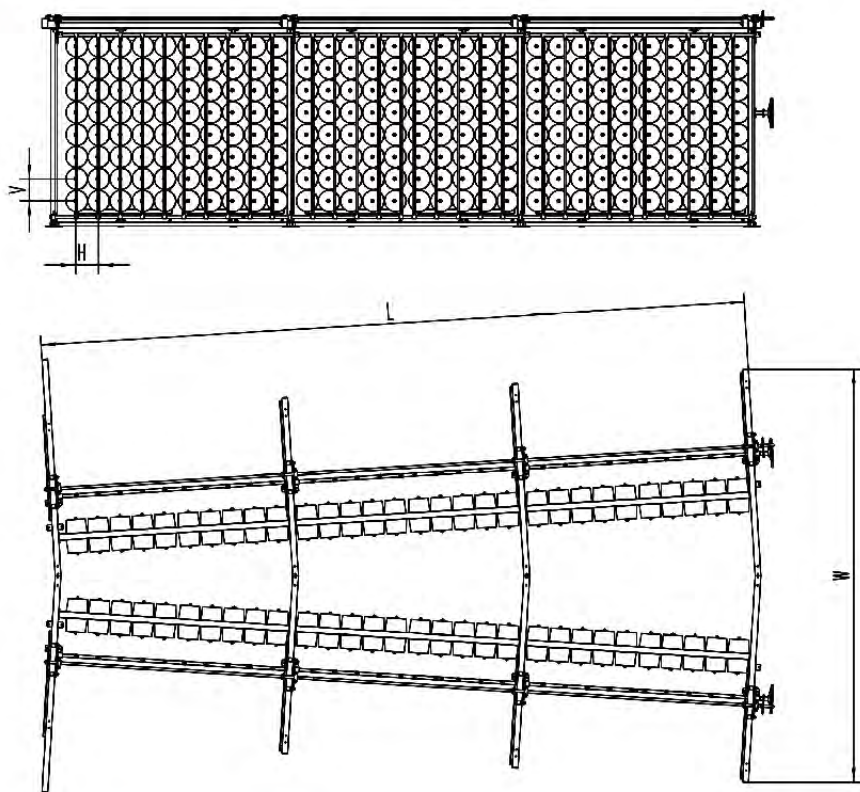

头份 Spindle qty.		480		560		640		720		800		880		960		1040	
锭距 Picht(HXV)	层数 Decks	L	W	L	W	L	W	L	W	L	W	L	W	L	W	L	W
230×230	8	7330	4287	8560	4441	9730	4580	10960	4734	12130	4873	13360	5027	14530	5166	15760	5317
250×250	8	7930	4364	9260	4527	10530	4682	11860	4844	13130	5000	14460	5162	15730	5313	17060	5475
270×270	8	8530	4574	9960	4752	11330	4916	12760	5090	14130	5260	15560	5436	16930	5600	18360	5774
300×300	8	9430	4684	11010	4880	12530	5066	14110	5256	15630	5440	17210	5634	18730	5820	20310	6012

头份 Spindle qty.		432		480		528		576		624		672		720		768	
锭距 Picht(HXV)	层数 Decks	L	W	L	W	L	W	L	W	L	W	L	W	L	W	L	W
350×350	6	13270	5218	14630	5384	16170	5572	17530	5740	19010	5938	20430	6090	21910	6270	23330	6442